


ENVIRO FLOAT


Heavy Welded Joints

Strong, high density Polyethylene covering provides protection from mammals, aquatic life, erosion, and general deterioration. Now with improved UV stability.

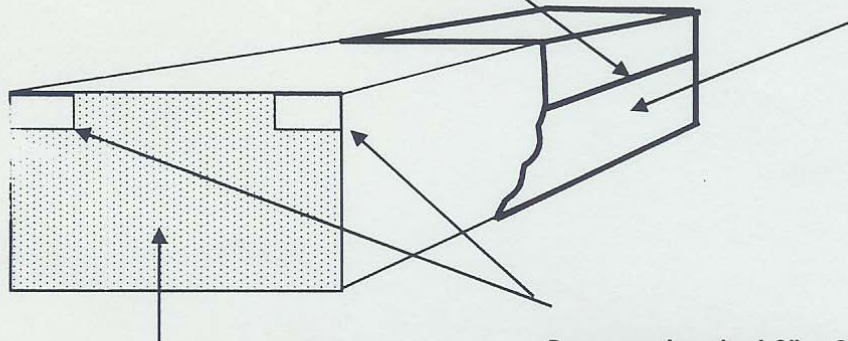

Buoyancy Polystyrene

Pressure treated 2" x 3" nailing strips run down the entire length of foam for a positive connection. Nailing strips can be placed on edge or flat to suit your needs.

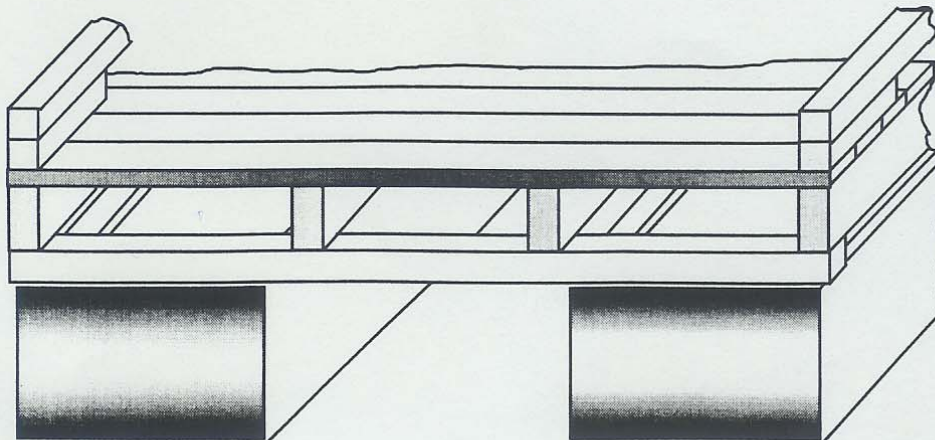

Sizes Lift

1' x 1.5' x 8'	660 lbs.
1' x 2' x 8'	880 lbs.
1.5' x 2' x 8'	1320 lbs.
2' x 2' x 8'	1760 lbs.
2' x 2.5' x 8'	2200 lbs.
2' x 3' x 8'	2640 lbs.
2' x 4' x 8'	3520 lbs.

All your dock's wood is well out of the water. No more boxing in flotation with expensive pressure treated wood

www.envirofloat.com

1-800-711-0333